

Projector Connector™ Type B Specifications

Visual Broadcast System

The Point-To-Point Projector Connector Type B allows you to simultaneously send a VGA Signal (up to 1280x1024) and a Stereo Audio Source to a video projector while only using 1 piece of UTP (Unshielded Twisted Pair) or STP (Shielded Twisted Pair) CAT5e or CAT6e cable. The system is precisely tuned to send a picture perfect image to the projector. The standard receiver supports 1 projector up to 200' away. The dual receiver supports 2 projectors up to 200' away. The extended distance receiver supports 1 projector up to 1,000' away.

Contact us:

Just Add Power
 PO Box 1064
 Indian Rocks Beach, FL 33785-1064
 800-615-0206
 Fax: 727-517-4054
www.justaddpower.com
sales@justaddpower.com

Transmitter



Projector Connector™ Type B Transmitter (VBS-PTP-308B)

1 UTP/STP VBS BUS Out Port
 1 VGA In (Supports 1280x 1024 WXGA)
 1 Stereo Line Audio In
 1 VGA Out; 1 Stereo Line Audio Out
 4.5" W x 3.5" D x 1.5" H; .5 pounds
 100-240V, 50/60 Hz, AC Adapter - .5 Amp

Receiver



Projector Connector™ Type B Receiver (VBS-PTP-108B-xxM) *xx=Cable Length

1 UTP/STP VBS BUS In Port
 1 VGA Out; 1 Stereo Line Audio Out
 4.5" W x 3.5" D x 1.5" H; .5 pounds
 100-240V, 50/60 Hz, AC Adapter - .5 Amp
 10M, 20M, 30M, 40M, 50M, 60M Cables





Projector Connector™ Type B Dual Receiver (VBS-PTP-108B-xxM) *xx=Cable Length

1 UTP/STP VBS BUS In Port
 1 VGA Out; 1 Stereo Line Audio Out
 4.5" W x 3.5" D x 1.5" H; .5 pounds
 100-240V, 50/60 Hz, AC Adapter - .5 Amp
 10M, 20M, 30M, 40M, 50M, 60M Cables



Projector Connector™ Extended Receiver (VBS-PTP-300M)

1 UTP/STP VBS BUS In Port
 1 VGA Out; 1 Stereo Line Audio Out
 4.5" W x 3.5" D x 1.5" H; .5 pounds
 100-240V, 50/60 Hz, AC Adapter - .5 Amp
 3 Fine Tuning Knobs (Focus and Gain)
 For use with cables 200' to 1000'

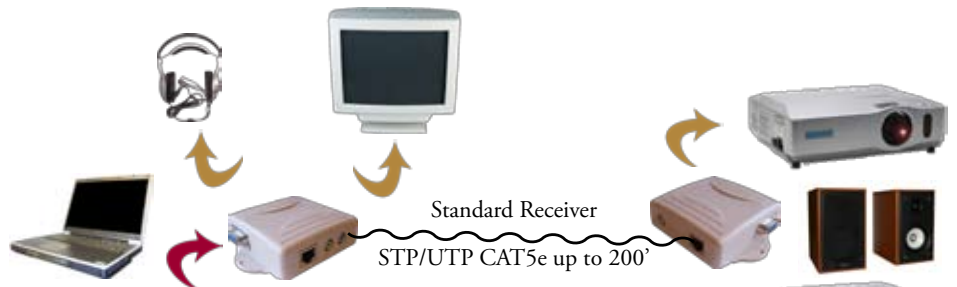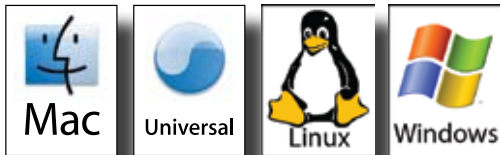

Extended Receiver
 STP/UTP CAT5e up to 1,000'



Dual Receiver
 STP/UTP CAT5e up to 200'