

Pocket Projector Connector™ Specifications

Visual Broadcast System

The Pocket Projector Connector™ allows you to send a VGA Signal (up to 1280x1024) to a video projector while only using one 20 Meter long piece of STP (Shielded Twisted Pair) CAT5e or CAT6e cable. The Pocket Projector Connector™ is precisely tuned to send a picture perfect image to the projector. Ideal for classrooms and small to medium size meeting rooms.

Contact us:

Just Add Power
PO Box 1064
Indian Rocks Beach, FL 33785-1064
800-615-0206
Fax: 727-517-4054
www.justaddpower.com
sales@justaddpower.com

Transmitter




Pocket Projector Connector™ Transmitter (VBS-PTP-308E)
1 STP BUS Out Port
1 VGA In (Supports 1280x 1024 WXGA)
Size 2.75" W x 1.375" D x 0.875" H
Weight .1 pounds
1 Ft. M/M VGA Cable
Integrated USB Power Tap - 5V

Receiver



Pocket Projector Connector™ Receiver (VBS-PTP-108E)
1 STP BUS In Port
1 VGA Out
Size 2.75" W x 1.375" D x 0.875" H
Weight .1 pounds
No Power Supply Required!

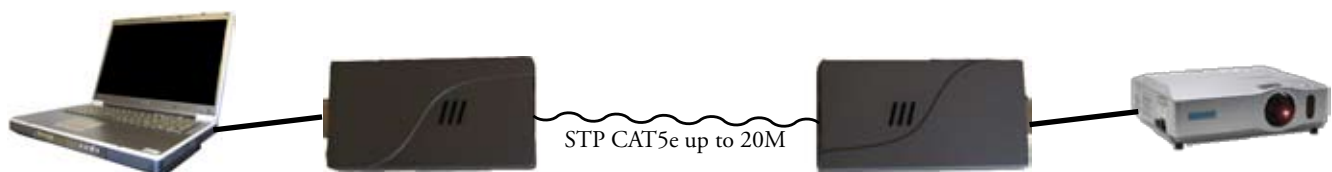

Just Add
 **Power** 

©Copyright 2009, Just Add Power Cardware Co., Inc.
All Rights Reserved.
All specifications subject to change without notice.

